

AMP1006000-100W

Product Features

- Frequency range from 100 ~ 6000MHz for 100-300M bandwidth
- Class AB GaN design
- Instantaneous wide bandwidth
- 50 Ohm Input/Output impedance
- Small size and Light weight
- High reliability and Ruggedness
- Ultra-wide digital interference source

Description

The AMP1006000-100W-28V is designed for general purpose. Operating frequency range is from 100~6000MHz,Customize any 100-300 MHz bandwidth.Gallium Nitride on GaN Technology is used and attached on a copper sub carrier.Improved thermal handling by patented technology.

Electrical Specifications @ $V_{DC}=24-32V$ (Wide voltage input) , $T_C=50^{\circ}C$, 50 Ω System

PARAMETER	UNIT	MIN	TYP	MAX	SYMBOL
Operating Frequency	MHz	100	-	6000	F _O
Operating Bandwidth	MHz	-	300	-	BW
Peak Output Power @CW Signal	W	-	100	-	P _{SAT}
Input Power	dBm	-	-	-	P _{IN}
Maximum Input Power @Without Damage	dBm	-	-	-	P _{IN,MAX}
Power Gain @Input Power 0dBm	dB	-	50±3	-	G _P
Gain Flatness @Input Power 0dBm	dB	-	-	±1	ΔG _P
Efficiency	%	50	52	55	E _{FF}
Harmonics 1 to N @Output Power100W	dBc	12	13	15	H _N
Spurious Level	dBc	60	-	-	Spur
Input VSWR	dB	-	-	-	VSWR
Output VSWR	dB	-	-	2:1	VSWR
Operating Voltage	V	24	28	32	V _{DC}
Current Consumption @Output Power100W	A	-	7.0	-	I _{DC}

Environmental Specifications

PARAMETER	UNIT	RATING	SYMBOL
Operating Case Temperature	°C	-20 ~ 85	T _C
Storage Temperature	°C	-40 ~ 105	T _{STG}
Relative Humidity(Non-condensing)	RH	95	%

AMP1006000-100W

Operating Voltages

PARAMETER	UNIT	NOMINAL VOLTAGE	VOLTAGE ACCURACY	SYMBOL
Operating Voltage	V	24-32	± 2%	V _{DC}
HPA Enable Voltage	V	5-32		V _{DC}
Current Monitor Voltage	V	-		
Temp Monitor Voltage	V	-		

Mechanical Specifications

PARAMETER	UNIT	TYP
Mass	kg	0.5
Dimension	mm	140 x80 x 25 (Without Connectors)
RF Connector	-	MCX Female : RF Input
		N Female : RF Output
DC Connector	-	Power Line, Male : Supply
Cooling		External Heat-sink Required


DC INTERFACE CONNECTOR – [Hybrid D-Sub 6-Pin, Male]

Pin#	Description	Specifications
1	TEMP	Analog voltage relative to Module's Temperature@10mV/°C
2	PA_EN	Amplifier Enable:TTL Logic High(3.3V/ON、 0V/OFF)
3	+28V	+28VDC
4	NC	NC
5	GND	Ground
6	+28V	+28VDC

AMP1006000-100W

Outline Drawing

* Unit: mm[inch] | Tolerance ± 0.2 [.0078]

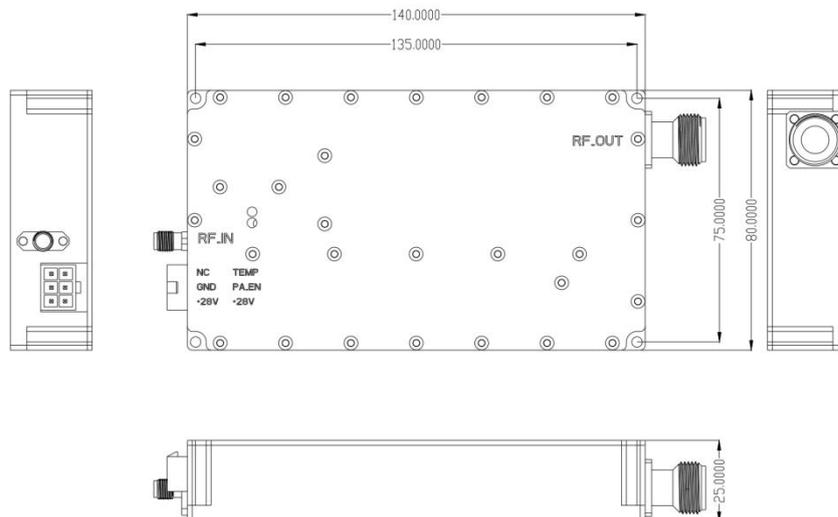

100-6000M

Side View [3D]



Our Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, Our Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. Our Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. Our products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold Our Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.